

Uncertainty of FEM Solutions Using a Nonlinear Least Squares Fit Method and a Design of Experiments Approach¹

Jeffrey T. Fong^{*2}, N. Alan Heckert², James J. Filliben², Pedro V. Marcal³, and Robert Rainsberger⁴

¹Contribution of the U. S. National Institute of Standards & Technology. Not subject to copyright.

²U. S. National Institute of Standards & Technology (NIST), ³Mpact Corp., ⁴XYZ Scientific Applications, Inc.

*Corresponding author: NIST, 100 Bureau Drive, Gaithersburg, MD 20899-8910 U.S.A. fong@nist.gov

Abstract: Uncertainty in COMSOL finite element simulations due to (a) mesh-induced truncation errors, and (b) model parameter uncertainties, is estimated using a nonlinear least squares logistic distribution fit method, and a design-of-experiments approach, respectively. Examples to illustrate both approaches are given using the COMSOL Structural Mechanics module (stress analysis of a wrench), the COMSOL RF module (application of an MRI RF coil design), and other general-purpose FEM software packages. Significance and limitations of both methods are presented and discussed.

Keywords: Design of Experiments, Finite Element Method, Logistic function, Nonlinear Least Squares Fit Method, Uncertainty Quantification.

Disclaimer: Certain commercial equipment, materials, or software are identified in this paper in order to specify the computational procedure adequately. Such identification is not intended to imply endorsement by NIST, nor to imply that the materials, equipment, or software identified are necessarily the best available for the purpose.

1. Introduction

Since the 1970s, the availability of powerful computers and general purpose finite element method (FEM) software packages such as NASTRAN, MARK, ANSYS, ABAQUS, LS-DYNA, COMSOL, etc., has drastically changed the engineering design and maintenance practice. More and more design and repair decisions are made today by engineers using the output of an FEM-based simulation.

The problem with any given FEM software package is that it seldom delivers simulations with an estimate of uncertainty due to variability from at least four sources, namely, (S-1) finite element type such as tetrahedron, hexahedron, etc., (S-2) finite element mesh density or degrees

of freedom that impacts on the truncation errors, (S-3) model parameters such as material properties, loadings, and boundary constraints, and (S-4) solution method and software platform. For engineering applications, the lack of uncertainty estimates is generally accepted since decisions are made with judgment and code-prescribed safety factors. For advanced engineering and scientific research, where input parameters are not well characterized and the fundamental governing equations are sometimes not even known, the lack of uncertainty quantification (UQ) in FEM simulations falls short for making them credible prior to a process of verification for mathematical and computational correctness and validation against physical reality or experiments.

During the last two decades, advances in model and simulation verification and validation (abbrev. V&V) dealing with (a) uncertain input and uncertainty in modeling (see, e.g., Ayyub¹, 1998; Lord and Wright², 2003; and Hlavacek³, 2004), (b) V&V (see, e.g., Oberkampf⁴, 1994; Roache⁵, 1998; Oberkampf, Trucano, and Hirsch⁶, 2002; Babuska and Oden⁷, 2004; and Fong, et al.⁸, 2008), and (c) validation in the context of metrology (see, e.g., Butler, et al.⁹, 1999; and Fong, et al.¹⁰, 2006), have appeared in the literature. Government agencies and professional societies have also added their concern and made major contributions in the form of directives¹¹, guides^{12, 13, 14}, and reviews¹⁵. Significant advances in V&V of FEM simulations have also been reported (see, e.g., Haldar, Guran, and Ayyub¹⁶, 1997; Haldar and Mahadevan¹⁷, 2000; Yang, et al.¹⁸, 2002; and Fong, et al.¹⁹, 2006. Fong, et al.²⁰, 2014).

In a recent series of 3 papers^{21, 22, 23}, Marcal, Fong, et al. addressed all four sources of uncertainties listed earlier, namely, (S-1) element type, (S-2) mesh density, (S-3) model parameters, and (S-4) solution platform, using two computational methods, namely, (1) the application of a nonlinear least squares (NL-LSQ)

fit method using a 4-parameter logistic distribution, and (2) the application of a “super-parametric” method.

The purpose of this paper is to apply those two methods to several FEM-based problems using COMSOL²⁴, and two other platforms named ABAQUS²⁵ and MPACT²⁶, such that a stage is set for us to quantify uncertainty due to not only the first three traditionally well-known sources, (S-1), (S-2), and (S-3), but also the less-known source (S-4) involving solution platforms such as COMSOL, ABAQUS, and MPACT. The following table summarizes our attempt to quantify FEM uncertainty in a systematic way using rigorous tools and an ad-hoc set of five test problems (TP-1 through TP-5):

Table 1: FEM Test Problems vs. Uncertainty Sources
Legion: ABQ = ABAQUS²⁵; ANS = ANSYS;
CMS = COMSOL²⁴; LSD = LS-DYNA;
 MPC = MPACT²⁶; = In this paper.

| Source Test Problem | S-1 Element Type [Ref. 21] | S-2 Mesh Density [Ref. 22] | S-3 Model Parameter [Ref. 23] | S-4 Solution Platform [Ref. 23] |
|--|--|-------------------------------------|--|---------------------------------------|
| TP-1 Wrench Stress Analysis | <i>Future Work</i> [Sect. 6] | CMS [This paper, Sect. 3] | <i>Future Work</i> [Sect. 6] | <i>Future Work</i> [Sect. 6] |
| TP-2 Simple Cantilever Resonance Frequency | ABQ MPC [8,21-23, and this paper, Sect. 4] | ABQ ANS [Ref. 8, 21-23] | ABQ ANS LSD [Ref. 8] | ABQ ANS LSD [Ref. 8] |
| TP-3 Cantilever with end Load | ABQ MPC [Ref. 22] | ABQ MPC [Ref. 22] | <i>Future Work</i> [Sect. 6] | ABQ MPC [Ref. 22] |
| TP-4 Pipe and welded Elbow with crack | ABQ MPC [21-23 & Sect.4 here] | ABQ MPC [21-23] | <i>Future Work</i> [Sect. 6] | ABQ MPC [21-23] |
| TP-5 MRI Coil Design | <i>Future Work</i> [Sect. 6] | <i>Future Work</i> [Sect. 6] | CMS [Ref. 20, and this paper, Sect. 5] | <i>Future Work</i> [Sect. 6] |

Throughout this work, we rely heavily on two additional analysis software packages, namely, Dataplot²⁷, and TrueGrid²⁸, even though the same results could have been obtained using other similar packages.

In Section 2, we introduce the 4-parameter logistic distribution^{29,30}, that is the key to an

application of the nonlinear least squares (NL-LSQ) fit method³¹ in Sections 3 and 4.

In Section 3, we describe an application of the NL-LSQ logistic distribution fit method, using a statistical analysis software package named Dataplot²⁷, to quantify FEM uncertainty in the stress analysis of a wrench using a parametric feature in the COMSOL Structural Mechanics module.

In Section 4, we introduce a “super-parametric” method, using a FEM pre-processor named TrueGrid²⁸, by applying it to quantify the FEM uncertainty of the first bending resonance frequency of a simple cantilever beam³², and the crack tip stress of a steel pipe elbow weldment²¹.

In Section 5, we apply a design of experiments approach^{33, 34} to the quantification of FEM uncertainty when we design a magnetic resonance imaging (MRI) coil²⁰ using the COMSOL RF module. This sets the stage for us to expand the investigation of the FEM uncertainty to all four sources, as described in Section 6 under “Future Work.”

In Section 7, we discuss the significance and limitations of the two methods (NL-LSQ and super-parametric) for FEM uncertainty quantification, and in Section 8 we end with some concluding remarks. A list of references is given in Section 9.

2. Logistic Distribution

A logistic distribution^{29,30}, named after Pierre Francois Verhulst³⁵ for his use in a study of population growth in 1845, is an S-curve with two asymptotes and is commonly represented by the following 4-parameter equation:

$$f(x) = y1 - L / (1 + \exp(-k * (x - a))), \quad (1)$$

where $y1$ is the upper asymptote, $L = y1 - y0$ with $y0$ equal to the lower asymptote, k is the S-curve shape steepness coefficient, and a , the x -value of the S-curve midpoint (sometimes denoted by $x0$).

To visualize this 4-parameter function, let us simplify it by assigning $y0 = 0$, and $y1 = 1$. Eq. (1) thus becomes a 2-parameter logistic distribution with two example plots given in Fig. 1. The parameter L is, therefore, a scale factor for the difference between the upper and the lower asymptotes.

An interesting property^{29,30} of $f(x)$ is given by the identity, $f(-x) = 1 - f(x)$. In this paper, we also use an alternative form of Eq. (1) based on that identity as shown below:

$$f(x) = y1 - L * \{ \exp(-k * (x - a)) / [1 + \exp(-k * (x - a))] \}. \quad (2)$$

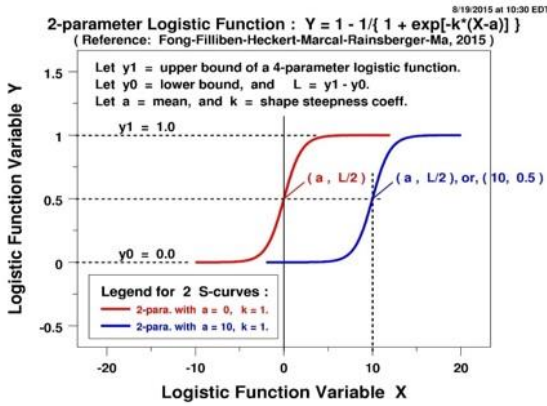


Figure 1. Plots of Two 2-parameter (a, k) Logistic distributions where the two asymptotes are assumed to be 0 (lower) and 1.0 (upper).

3. Uncertainty Source S-2 (Mesh Density)

In theory, as the finite element mesh density increases, the sequence of solutions of any variable of interest, say, the max. Mises stress at a specific point, converges to a stable value. This makes the logistic distribution an ideal candidate to model such a sequence. In Figs. 2-5, we show an example of this in the stress analysis of a wrench using a parametric feature of the COMSOL²⁴ and the nonlinear least squares fit macro of Dataplot²⁷. As we increase the number of points from 5 (Fig. 6) to 10 (Fig. 8), we see that the predicted asymptotic stress converges.

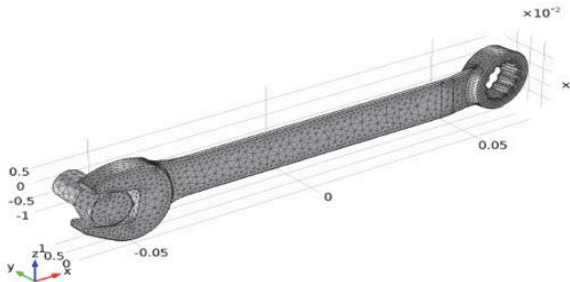


Figure 2. A wrench with a finite element mesh²⁴.

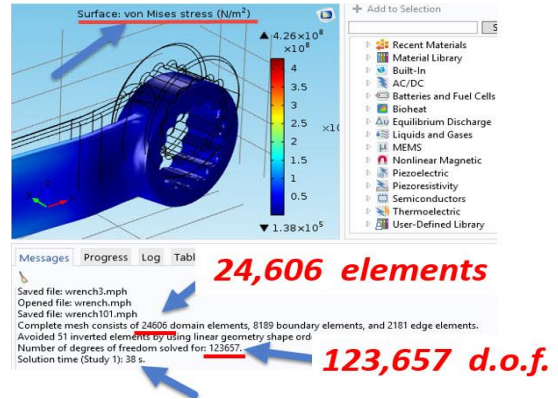


Figure 3. Result of a COMSOL meshing for a fine mesh with 24,606 tetra-04 elements & 123,657 d.o.f.

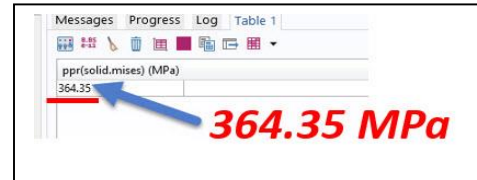


Figure 4. Max. Mises stress from COMSOL analysis.

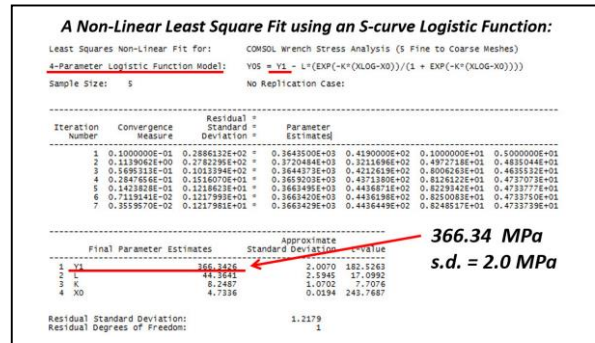


Figure 5. Max. stress from a Dataplot²⁷ NL-LSQ fit.

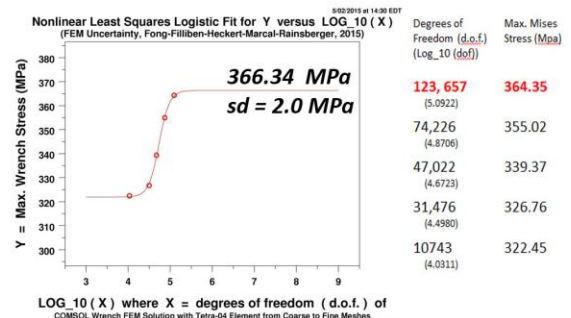


Figure 6. Plot of a 5-point Dataplot²⁷ NL-LSQ fit.

Table 2. Results of a Parametric Run in COMSOL

| FEM Result Y (MPa) | Degrees of Freedom (dof) X |
|--------------------|----------------------------|
| 322.45 | 10743 |
| 326.76 | 31476 |
| 339.37 | 47022 |
| 355.02 | 74226 |
| 361.40 | 118750 |
| 364.35 | 127663 |
| 368.55 | 313970 |
| 369.24 | 732220 |
| 369.72 | 1119600 |
| 369.73 | 1517800 |
| 369.61 | 2113600 |
| 369.54 | 2670100 |
| 369.80 | 3411800 |
| 369.72 | 4193000 |
| 369.72 | 5033200 |
| 369.61 | 5919600 |
| 369.71 | 6,932,883 |

5th point
In Fig. 6.

10th point
In Fig. 7.

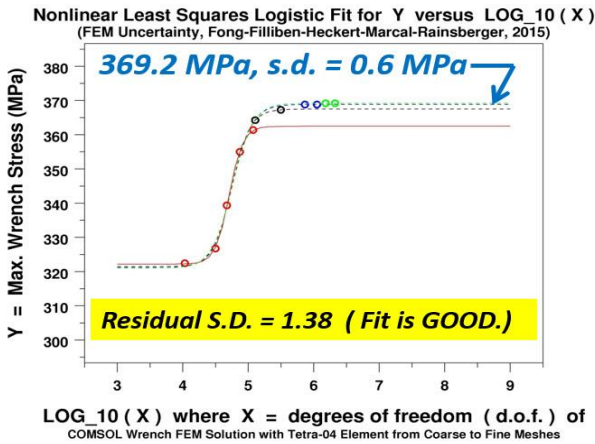


Figure 7. Plot of a 10-point Dataplot²⁷ NL-LSQ fit of COMSOL solution of stress analysis of a wrench.

4. Uncertainty Source S-1 (Element Type)

The existence of an automatic meshing algorithm for the 4-node tetrahedron element led FEM users to believe that one can obtain accurate result with a tetra-04 mesh by pushing the mesh density to its limit. In a recent paper by Marcal, Fong, et al.²¹, that belief has been shown to be false. In other words, element type matters. This has led to the development of a “super-parametric” method, as implemented in TrueGrid²⁸, where the element type, mesh density, and solution platform are parametric in addition to model parameters. A typical TrueGrid output is given in Fig. 8, and two examples of UQ for S-1 (element type) are shown in Figs. 9 (cantilever) and 10 (elbow).

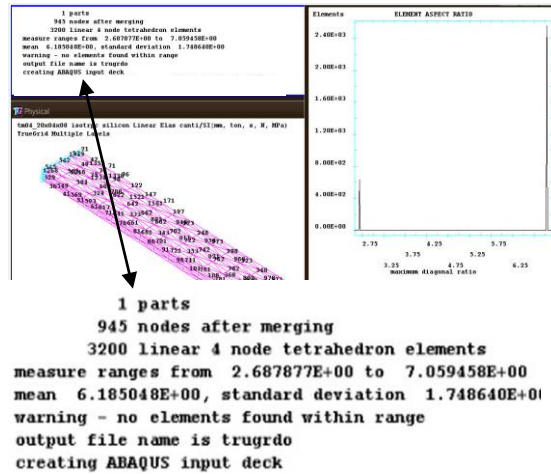


Figure 8. A typical screen output of a TrueGrid²⁸ code creating an ABAQUS code for a cantilever mesh.

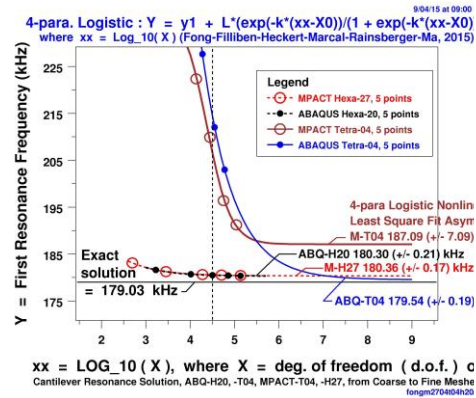


Figure 9. Plot of FEM for 3 element types, two solution platforms, and 5 mesh densities for a cantilever bending resonance frequency problem²³.

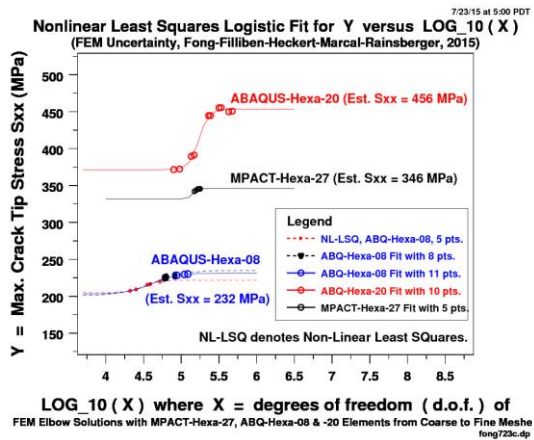


Figure 10. Plot of FEM results for 3 element types for UQ of max. crack-tip stress of an elbow weldment²¹.

5. Uncertainty S-3 (Model Parameters)

In COMSOL, one addresses the S-3 (model parameters) uncertainty problem by parametrizing geometrical parameters, material property coefficients, loadings, and boundary constraints, as shown in a recent UQ paper by Fong, Heckert, et al²⁰. In Figs. 10 and 11, we show how one solves an optimization problem for the design of a magnetic resonance imaging (MRI) RF coil by applying a fractional factorial orthogonal design of experiments method^{33,34}. In Fig. 12, we show that the UQ of an earlier design with 7 factors led us to an improved design with a much smaller standard deviation.

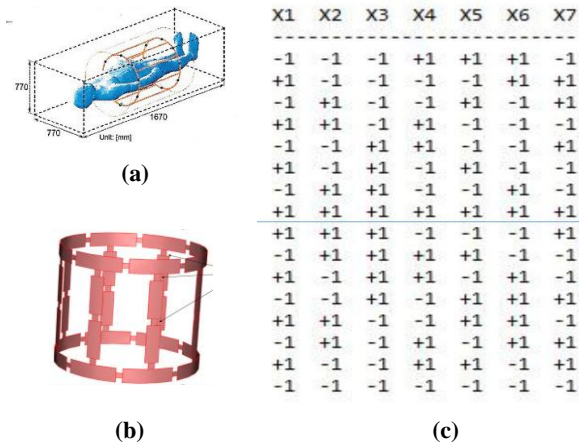


Figure 11. (a) An MRI facility. (b) A prototype MRI RF coil. (c) A 7-factor 16-run fractional factorial orthogonal experimental design for UQ of the coil.

Table 3. Data for the 7-factor, 16-run UQ experiment

| | X1 | X2 | X3 | X4 | X5 | X6 | X7 |
|---------------|---------|---------|--------|------|-----|------|--------|
| | Sigma | Epsilon | C | V0 | w1 | L3 | bet2 |
| Base Run (00) | 0.0001 | 80 | 177 | 500 | 80 | 35 | 5 |
| Unit | S/m | l | pF | volt | mm | mm | degree |
| +/- variation | 10 % | 5 % | 2 % | 2 % | 5 % | 10 % | 10 % |
| Run No. (01) | 0.00009 | 76 | 173.46 | 510 | 84 | 38.5 | 4.5 |
| Run No. (02) | 0.00011 | 76 | 173.46 | 490 | 76 | 38.5 | 5.5 |
| Run No. (03) | 0.00009 | 84 | 173.46 | 490 | 84 | 31.5 | 5.5 |
| Run No. (04) | 0.00011 | 84 | 173.46 | 510 | 76 | 31.5 | 4.5 |
| Run No. (05) | 0.00009 | 76 | 180.54 | 510 | 76 | 31.5 | 5.5 |
| Run No. (06) | 0.00011 | 76 | 180.54 | 490 | 84 | 31.5 | 4.5 |
| Run No. (07) | 0.00009 | 84 | 180.54 | 490 | 76 | 38.5 | 4.5 |
| Run No. (08) | 0.00011 | 84 | 180.54 | 510 | 84 | 38.5 | 5.5 |
| Run No. (09) | 0.00011 | 84 | 180.54 | 490 | 76 | 31.5 | 5.5 |
| Run No. (10) | 0.00009 | 84 | 180.54 | 510 | 84 | 31.5 | 4.5 |
| Run No. (11) | 0.00011 | 76 | 180.54 | 510 | 76 | 38.5 | 4.5 |
| Run No. (12) | 0.00009 | 76 | 180.54 | 490 | 84 | 38.5 | 5.5 |
| Run No. (13) | 0.00011 | 84 | 173.46 | 490 | 84 | 38.5 | 4.5 |
| Run No. (14) | 0.00009 | 84 | 173.46 | 510 | 76 | 38.5 | 5.5 |
| Run No. (15) | 0.00011 | 76 | 173.46 | 510 | 84 | 31.5 | 5.5 |
| Run No. (16) | 0.00009 | 76 | 173.46 | 490 | 76 | 31.5 | 4.5 |

Non-Uniformity of NIRS Coil Magnetic Flux Density in Inner Water Tube
95% Uncertainty Bounds Plot with Dataplot (Fong-Stupic-Keenan-Russek, 2014)

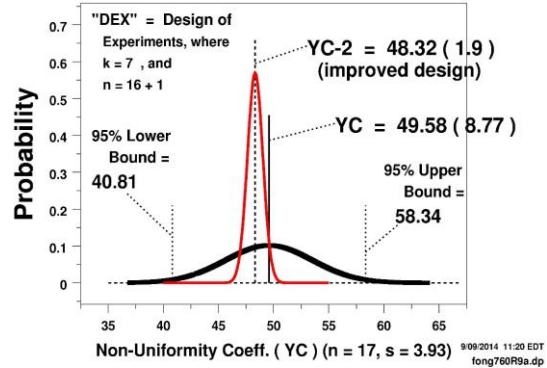


Figure 12. Plots for two UQ experiments with the first design (in black) and the improved design (in red).

6. Future Work

In this paper, we have shown through four test problems that the application of a nonlinear least squares fit method and a super-parametric method allows us to address 3 sources of FEM uncertainty, namely, the element type, the mesh density, and the modeling parameters. As listed in Table 1, we have shown elsewhere^{8, 21-23} that the solution platform source can also be addressed using the super-parametric method in 3 test problems, TP-2, TP-3, and TP-4. To complete this investigation with 5 test problems and 4 UQ sources, we need to undertake what are missing in Table 1 as future work.

7. Significance & Limitations

The FEM UQ approach outlined in this paper is significant because both the NL-LSQ method and the super-parametric method are easy to implement to cover all 4 sources of uncertainty. The approach is limited in the sense that it is not applicable to addressing the question whether a model is physically correct.

8. Concluding Remark

We conclude that a rigorous tool using a 4-parameter logistic distribution and a nonlinear least squares fit method has been found to address all four sources of FEM uncertainty, when we combine the tool with a super-parametric and a design of experiments method.

9. References

1. B. M. Ayyub, ed., *Uncertainty Modeling and Analysis in Civil Engineering*. CRC Press (1998).
2. G. J. Lord, and L. Wright, "Uncertainty Evaluation in Continuous Modeling," Report to the National Measurement System Policy Unit, Department of Trade and Industry, NPL Report CMSC 31/03. Teddington, Middlesex, U.K.: National Physical Laboratory (2003).
3. I. Hlavacek, J. Chleboun, and I. Babuska, *Uncertain Input Data Problem and the Worst Scenario Method*. Elsevier (2004).
4. W. L. Oberkampf, "A Proposed Framework for Computational Fluid Dynamics Code Calibration/ Validation," *Proc. 18th AIAA Aerospace Ground Testing Conference*, Colorado Spring, CO, AIAA Paper No. 94-2540 (1994).
5. P. J. Roache, *Verification and Validation in Computational Science and Engineering*. Hermosa Publishers, Albuquerque, NM (1998).
6. W. L. Oberkampf, T. G. Trucano, and C. Hirsch, "Verification, Validation, and Predictive Capability in Computational Engineering and Physics," *Proc. Workshop on Foundations for V & V in the 21st Century*, 22-23 Oct. 2002, John Hopkins Univ./Appl. Phys. Lab., Laurel, Maryland, D. Pace & S. Stevenson, eds., published by Society for Modeling & Simulation International (2002).
7. I. Babuska, and J. T. Oden, "Verification and validation in computational engineering and science: basic concepts," *Comput. Methods Appl. Mech. Engrg.*, **Vol. 193**, pp. 4057-4066 (2004).
8. J. T. Fong, J. J. Filliben, et al., "Design of Experiments Approach to Verification and Uncertainty Estimation of Simulations Based non Finite Element Method," *Proc. Conf. of Amer. Soc. for Engineering Education (ASEE)*, June 22-25, 2008, Pittsburgh, PA, paper no. AC2008-2725 (2008).
9. B. P. Butler, M. G. Cox, A. B. Forbes, P. M. Harris, and G. J. Lord, "Model Validation in the Context of Metrology: A Survey," *UK NMS Software Support for Metrology Programme, Model Validation Survey v1.0, NPL Report CISE 19/99*. Teddington, Middlesex, U.K.: National Physical Laboratory (1999).
10. J. T. Fong, J. J. Filliben, R. deWit, R. J. Fields, B. Bernstein, and P. V. Marcal, "Uncertainty in Finite Element Modeling and Failure Analysis: A Metrology-Based Approach," *ASME Trans., J. Press. Vess. Tech.*, **Vol. 128**, pp. 140-147 (2006).
11. Anon., Department of Defense (DOD), *DOD Directive No. 5000.61: Modeling and Simulation (M&S) Verification, Validation, and Accreditation (VV&A)*, Defense Modeling and Simulation Office, Office of the Director of Defense Research and Engineering (1996).
12. ANS, *Guidelines for the Verification and Validation of Scientific and Engineering Computer Programs for the Nuclear Industry*, American Nuclear Society, ANSI/ANS-10.4-1987 (1987).
13. AIAA, *Guide for the Verification and Validation of Computational Fluid Dynamics Simulations*, American Institute of Aeronautics and Astronautics, AIAA-G-077-1998, Reston, VA (1998).
14. ASME, *Guide for Verification and Validation in Computational Solid Mechanics*, American Society of Mechanical Engineers, ASME-PTC-60-Guide, V&V 10-2006, Product Catalog - Codes and Standards - Computational/Analysis., New York, NY (2006).
15. M. L. Cohen, J. E. Ralph, and D. L. Steffey, eds., *Statistics, Testing, and Defense Acquisition: New Approaches and Methodological Improvements*, National Academy Press, Washington, DC (1998).
16. A. Haldar, A. Guran, and B. M. Ayyub, eds. *Uncertainty Modeling in Finite Element, Fatigue and Stability of Systems*. World Scientific Publishing Co. Pte. Ltd., 1060 Main Street, River Edge, NJ 07661 (1997).
17. A. Haldar, and S. Mahadevan, *Reliability Assessment Using Stochastic Finite Element Analysis*. Wiley (2000).
18. D. Yang, S. L. Oh, H. Huh, and Y. H. Kim, eds., "Numisheet 2002: Design Innovation Through Virtual Manufacturing," *Proc. 5th Int. Conf. and Workshop on Numerical Simulation of 3D Sheet Forming Processes - Verification of Simulation and Experiment*, 21-25 October 2002, Jeju Island, Korea, Vol. 2, published by Korea Advanced Inst. of Science and Technology (KAIST), 373-1, Science Town, Taejon, 305-701, Korea (2002).
19. Fong, J. T., Filliben, J. J., deWit, R., and Bernstein, B., "Stochastic Finite Element Method (FEM) and Design of Experiments for Pressure Vessel and Piping (PVP) Decision Making," *Proc. of 2006 ASME Pressure Vessels and*

- Piping Division Conference*, July 23-27, 2006, Vancouver, B. C., Canada, paper no. PVP2006-ICPVT11-93927. New York, NY: American Society of Mechanical Engineers (2006).
20. J. T. Fong, N. A. Heckert, J. J. Filliben, L. Ma, K. F. Stupic, K. E. Keenan, and S. E. Russek, "A Design-of-Experiments Approach to FEM Uncertainty Analysis for Optimizing Magnetic Resonance Imaging RF Coil Design," *Proc. 2014 International COMSOL Conference, Oct. 8-10, 2014, Boston, MA, U.S.A.*, www.comsol.com (2014).
21. P.V. Marcal, J.T. Fong, R. Rainsberger, and L. Ma, "Finite Element Analysis of a Pipe Elbow Weldment Creep- Fracture Problem Using an Extremely Accurate 27-node Tri-Quadratic Shell and Solid Element Formulation," *Proc. 14th International Conf. on Pressure Vessel Technology, ICPVT-14, Sep. 23-26, 2015, Shanghai, China* (2015).
22. J.T. Fong, J.J. Filliben, N.A. Heckert, P.V. Marcal, R.Rainsberger, and L. Ma, "Uncertainty Quantification of Stresses in a Cracked Pipe ElbowWeldment using a Logistic Function Fit, a Nonlinear Least Square Algorithm, and a Super-Parametric Method," *Proc. 14th International Conf. on Pressure Vessel Technology, ICPVT-14, Sep. 23-26, 2015, Shanghai, China* (2015).
23. J. T. Fong, R. Rainsberger, P. V. Marcal, J. J. Filliben, N. A. Heckert, and L. Ma, "A Super-Parametric Approach to Assessing Accuracy of Finite Element Method (FEM) Results by increasing Mesh Density, varying Element Types, and running different FEM codes," *Proc. 14th International Conf. on Pressure Vessel Technology, ICPVT-14, Sep. 23-26, 2015, Shanghai, China* (2015).
24. Anon., *Introduction to COMSOL Multiphysics*, v.5.1. Burlington, MA: COMSOL, Inc., <http://cdn.comsol.com/documentation/5.1.0.180/IntroductionToCOMSOLMultiphysics.pdf>, (2015).
25. Anon., *Abaqus/CAE User's Guide, and Abaqus Analysis User's Guide*, version 6.13. Dassault Systemes Simulia Corp., Providence, RI, U.S.A., <http://www.3ds.com/products-services/simulia/support/documentation/> (2015).
26. P.V. Marcal, *MPACT User Manual*, Mpack Corp., Oak Park, CA 91377, U.S.A. (2001).
27. J.J. Filliben, N.A. Heckert, *Dataplot: A Statistical Data Analysis Software System*, National Institute of Standards & Technology, Gaithersburg, MD 20899, U.S.A., <http://www.itl.nist.gov/div898/software/dataplot.html> (2002).
28. R. Rainsberger, *TrueGrid User's Manual: A Guide and a Reference, Volumes I, II, and III*, Version 3.0.0. Published by XYZ Scientific Applications, Inc., Pleasant Hill, CA 94523, www.truegrid.com/pub/TGMAN300.1.pdf (2014).
29. M. Evans, N. Hastings, and B. Peacock, *Statistical Distributions*, third ed., pp. 124-128. Wiley (2000)
30. N. Balakrishnan, *Handbook of the Logistic Distribution*. Marcel Dekker, New York, 1992.
31. N.R. Draper, and H. Smith, *Applied Regression Analysis*, Chapters 1-3, pp. 1-103, and Chapter 10, pp. 263-304. Wiley (1966).
32. S. Timoshenko, and D. Young, *Vibration Problems in Engineering*, 3rd ed., page 338. D. Van Nostrand (1955).
33. G. E. Box, W. G. Hunter, and J. S. Hunter, *Statistics for Experimenters: An Introduction to Design, Data Analysis, and Model Building*. Wiley (1978).
34. D. C. Montgomery, *Design and Analysis of Experiments*, 5th ed. Wiley (2000).
35. P.F. Verhulst, Recherches mathematiques sur la loi d'accroissement de la population [Mathematical Researches into the Law of Population Growth Increase], 1845, recently republished in *Nouveaux Memoires de l'Academie Royale des Sciences et Belles-Lettres de Bruxelles*, Vol. 18, pp. 1-42 (2013).

10. Acknowledgments

We wish to thank **Drs. Sergei Yushanov, Kyle Koppenhoefer**, and **Jeffrey Crompton**, all of Altasim Technologies, LLC, Columbus, OH, for assistance during a series of tutorial workshops the first author (J.T.F.) attended in 2013-2015. We are also grateful to **Dr. Kathryn Keenan, John Koontz, Denis Lehane, Dr. Li Ma, M. Katherine Pagoaga, Dr. Stephen Russek**, and **Dr. Karl Stupic**, all of NIST, for their assistance during the course of this investigation.